

REMATIC, DMS3,
 24 V DC (2P)
 (3P)
 PROFIBUS DP V0/V1 MODBUS RTU.
 : LED , RS-232).
 a a
 « - ».



DMS3

- 3x380 VAC
-
-
- T
-
- a 60 % 100 %
- ()
- ()
- 2 7 R1, R2, RE1...RE 5 (18)
- READY
- - 0/4 - 20 mA, 4 - 12 mA, 12 - 20 mA 0/2 - 10 V
- 24 V DC - , ,
- 24 V DC - , ,
-
- ESD ()
- - 4 - 20 mA a ()
- 24 V DC, 100
-
- LED
-
- (, ,)
- RS 232
-
-
-
- PROFIBUS DP V0/V1,
- MODBUS RTU,
- IP 67

MTR 3PA

407. x - x x x x x / x x

10)		12)		o e			
15150	()	60721-2-1	(R)+WDr, MWDr, EWDr	C3	-25°C +55°C	IP 55	0
						IP 67	1
			(M)	C3	-25°C +55°C	IP 67	2
				C3	-40°C +40°C	IP 67	3
			(WW)	C3	-25°C +55°C	IP 67	6
				C4	-40°C +40°C	IP 67	7

		23)		
c	50 Hz	Y/D 400/230 V AC	Z501; Z556; Z557; Z571	2
		Y/D 380/220 V AC		N
		Y/D 400/230 V AC	Z501a; Z556a; Z557a; Z571a	E
		Y/D 380/220 V AC		F
c	50 Hz	230 V AC	Z514; Z523; Z515+Z500	9
		220 V AC	Z574+Z500f	L

31)		32)		33)		3x400 (380) V, 50Hz			36)
12.5 kN	7.5 kN	5.0 kN	32 mm/min	180 W	850 min ⁻¹	0.72 A			A
			50 mm/min	120 W	1 350 min ⁻¹	0.42 A			B
			80 mm/min	120 W	1 350 min ⁻¹	0.42 A			C
			125 mm/min	180 W	1 350 min ⁻¹	0.58 A			D
25 kN	15.0 kN	10.0 kN	32 mm/min	180 W	850 min ⁻¹	0.72 A			E
			50 mm/min	120 W	1 350 min ⁻¹	0.42 A			F
			80 mm/min	120 W	1 350 min ⁻¹	0.42 A			G
			125 mm/min	180 W	1 350 min ⁻¹	0.58 A			H
36 kN ³⁵⁾	21.5 kN	-	250 mm/min ³⁴⁾	370 W	2 740 min ⁻¹	1.00 A			N
			50 mm/min	180 W	850 min ⁻¹	0.72 A			P
			80 mm/min	180 W	1 350 min ⁻¹	0.58 A			J
20 kN	12.0 kN	8.0 kN	125 mm/min	250 W	1 350 min ⁻¹	0.77 A			K
			180 mm/min	370 W	1 370 min ⁻¹	1.06 A			L
			32 mm/min	180 W	850 min ⁻¹	0.72 A			A
16 kN	9.6 kN	6.4 kN	50 mm/min	180 W	1 350 min ⁻¹	0.58 A			B
12.5 kN	7.5 kN	5.0 kN	63 mm/min	250 W	1 350 min ⁻¹	0.77 A			M
8 kN	4.8 kN	3.2 kN	80 mm/min	370 W	1 370 min ⁻¹	1.06 A			C
			125 mm/min	370 W	1 370 min ⁻¹	1.06 A			D

35)				
10	10 - 100 mm			D
	10 - 100 mm	LCD	41)	Z473a G

DMS3	2P	24 V DC		-	Z557; Z557a Z515+Z500	F
	3P/2P	0/4 - 20 mA	24 V DC	4 - 20 mA	Z501; Z501a Z514+Z500	G
		0/2 - 10 V				Z556; Z556a Z523+Z500
DMS3 M1	/2P	MODBUS RTU	24 V DC	-	Z571; Z571a Z574+Z500f	M
DMS3 M2						N
DMS3 P1		PROFIBUS DP V0 / V1				P
DMS3 P2						R

MTR 3PA

407. x - x x x x x / x x






	/ /	62)	63)			
				25 kN	25 - 36 kN	
	30/100/-	M20x1,5	P-2085/A	P-2085/A	-	A
	74/100/-	M16x1,5	P-2085/B	P-2085/B	-	B
	130/100/-		P-2085/C	P-2085/C	-	C
	50/40/-	M14x2	-	P-2085/D	-	D
60/60/-	-		P-2085/E	P-2087	E	
	112/100/ø80 H8	M10x1 ⁶¹⁾	P-2086/A	P-2086/A	-	L
	110/100/ø65,15 H7	7/8-UN-9	P-2086/B	P-2086/B	-	M
	-		-	-	-	-
	-	1.1/8" UNC	-	-	-	-
	-		-	-	-	-
	-	1.1/2" UNC	-	-	-	-

/			
		, 20	
A			0 1
B			0 3
		: A+B=20	


DB-9F/RJ45	DMS3	224 A80 100
------------	------	-------------

- 10) :
- 31) « » .2. 60 100%.
- 32) S2-15 a S4-25% 90 /
- 33) S4-25%, 90 - 1200 /
- 35) 3x400 VAC.
- 36) 25 - 36 kN, 80mm.
- 41) LCD -25°C
- 61) 25 kN.
- 62)
- 63) Profibus Modbus

MTR 3PA

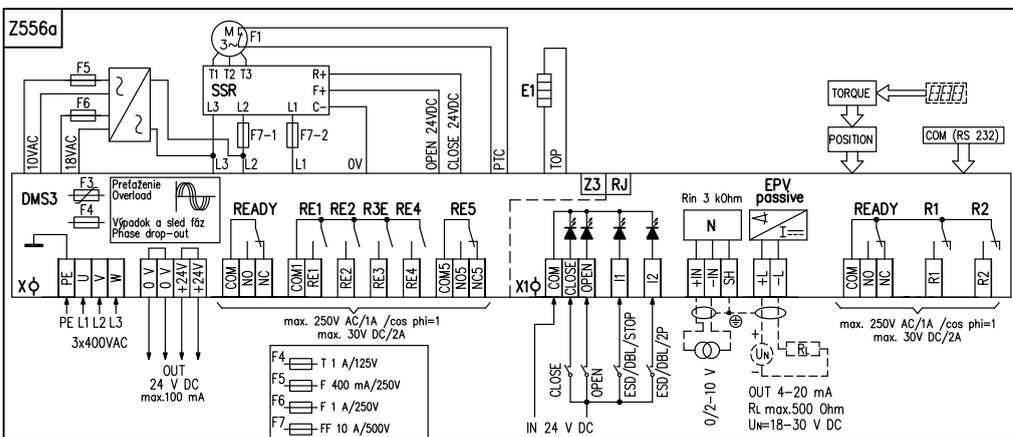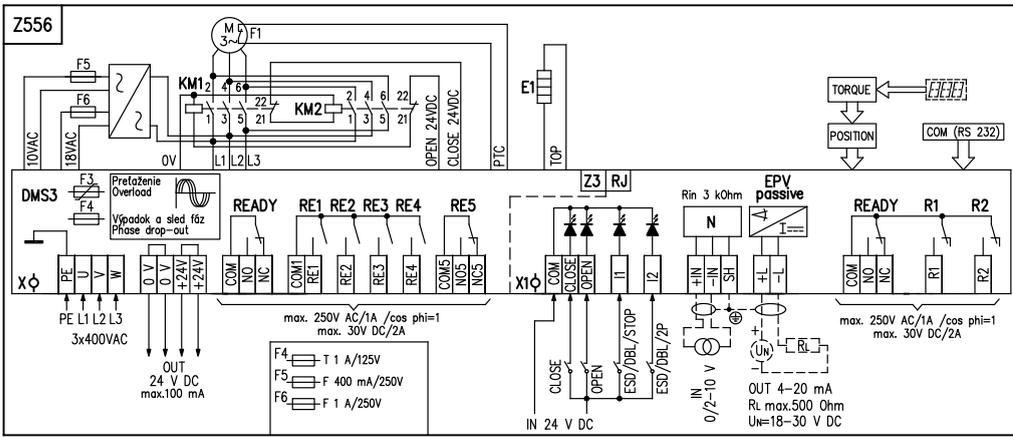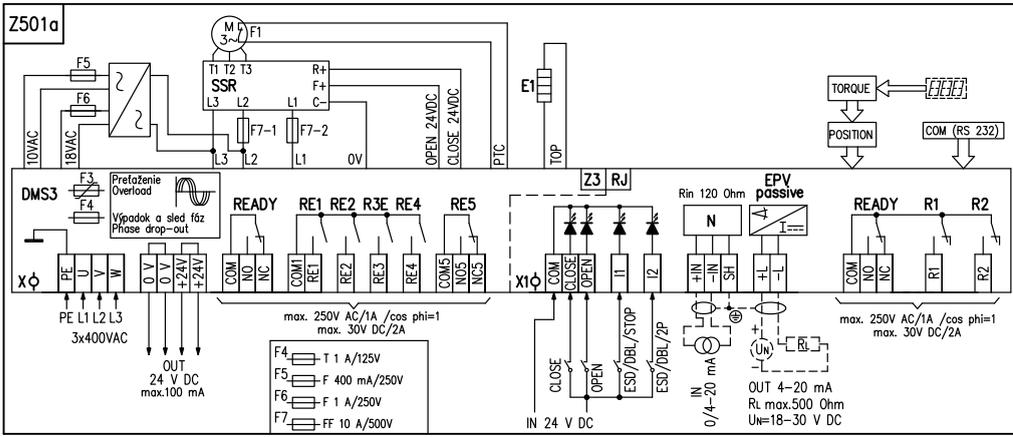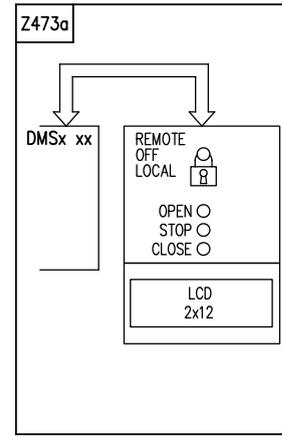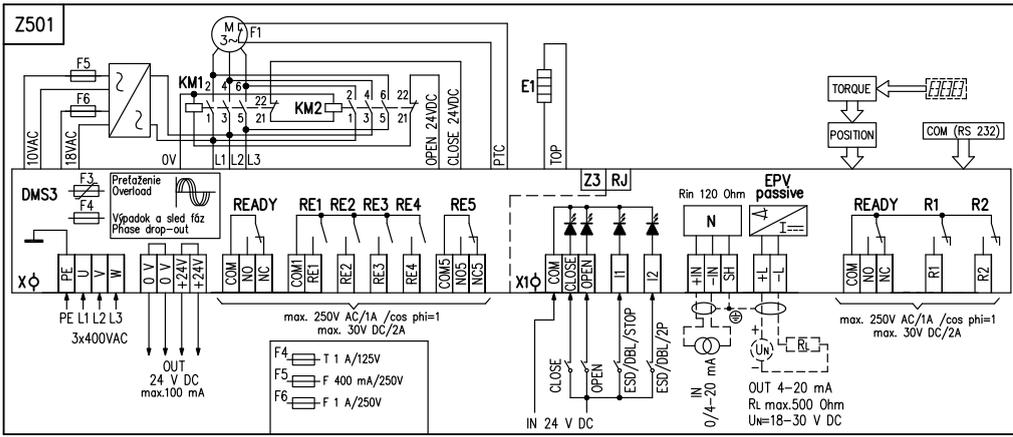


MTR 3PA

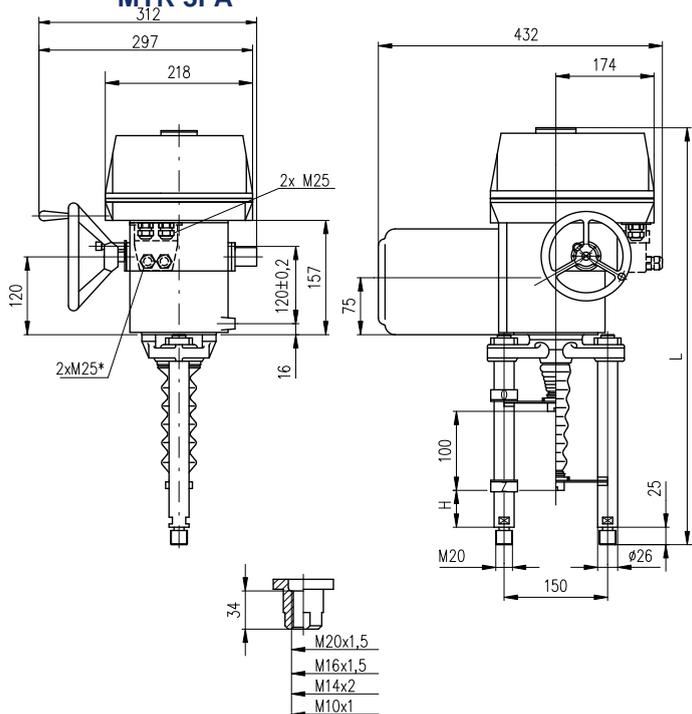


P-1403a/C	130	710
P-1403a/B	74	630
P-1403a/A	30	586
	H	L

P-1403a

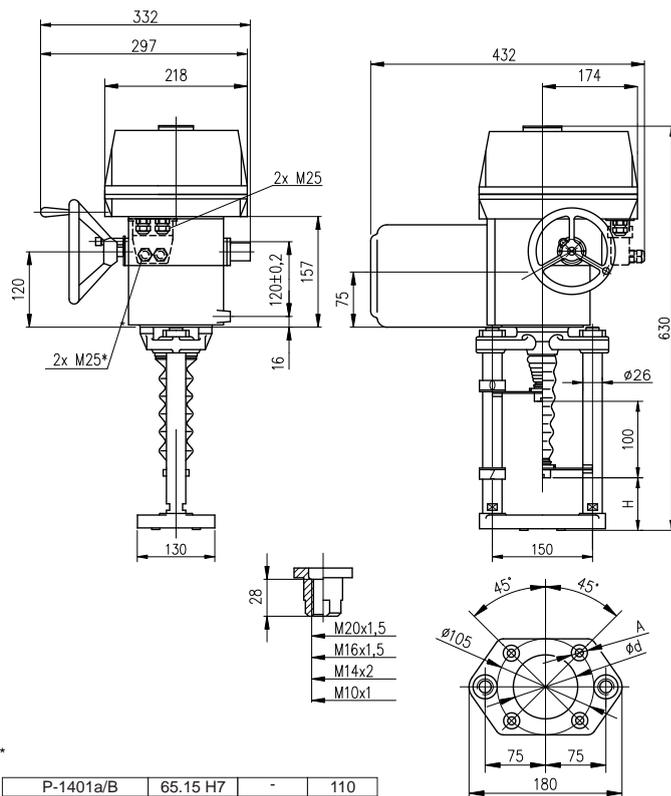


P-1401a/B	65.15 H7	-	110
P-1401a/A	80 H8	4x Ø13	112
	Ød	A	H

P-1401a

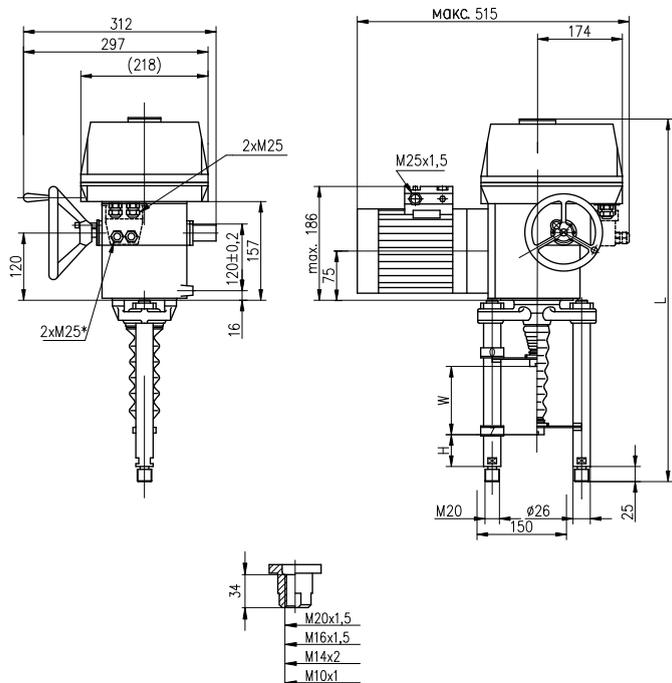


P-1400a/E	60	551	60
P-1400a/D	50	551	40
P-1400a/C	130	686	100
P-1400a/B	74	630	100
P-1400a/A	30	586	100
	H	L	W

P-1400a

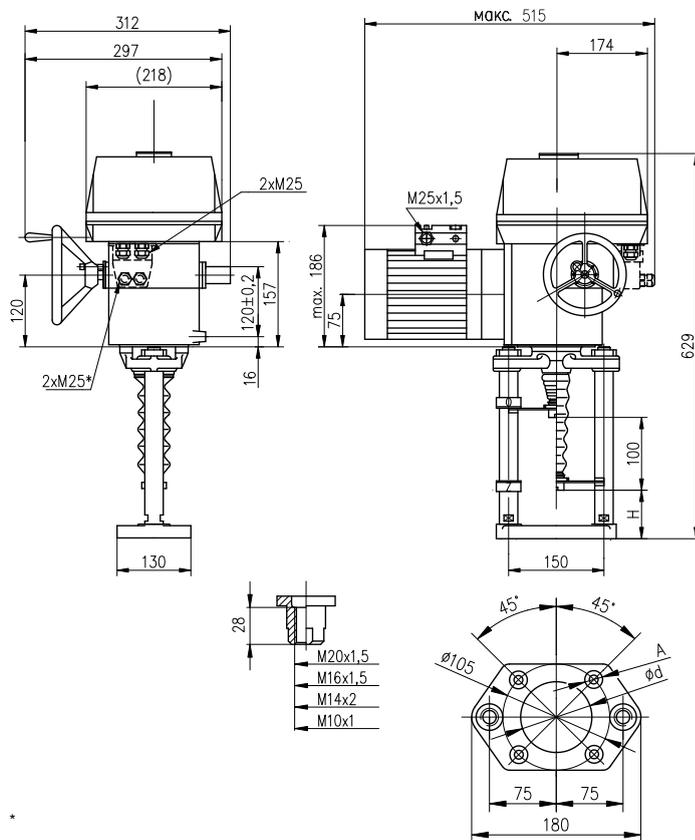


P-1402a/D	85 H12	-	110
P-1402a/C	70 H12	-	110
P-1402a/B	65.15 H7	-	110
P-1402a/A	80 H8	4x Ø13	112
	Ød	A	H

P-1402a

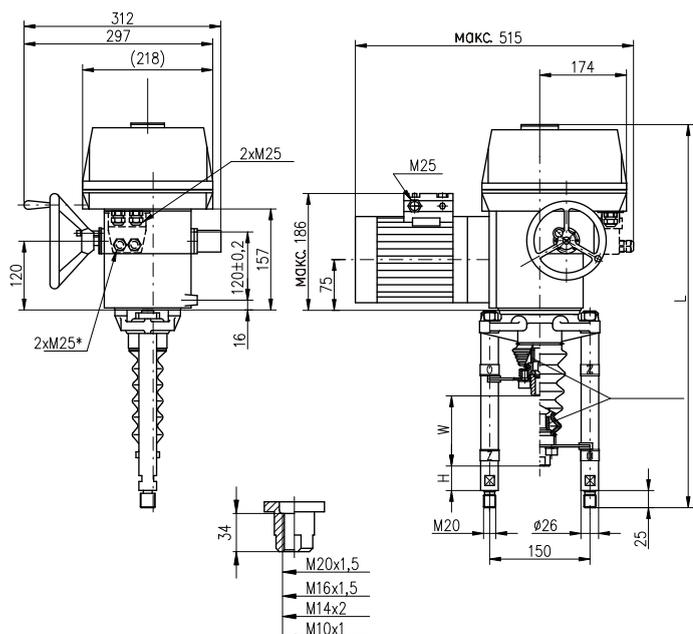


P-1405a/E	60	567	60
P-1405a/C	130	692	80
P-1405a/B	74	636	80
P-1405a/A	30	591	80
	H	L	W


P-1405a

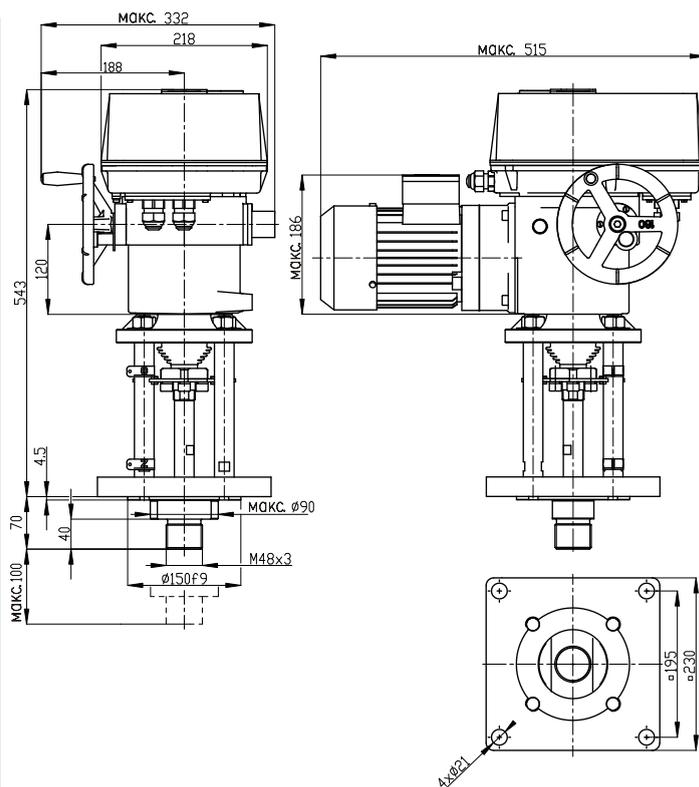

P-2017

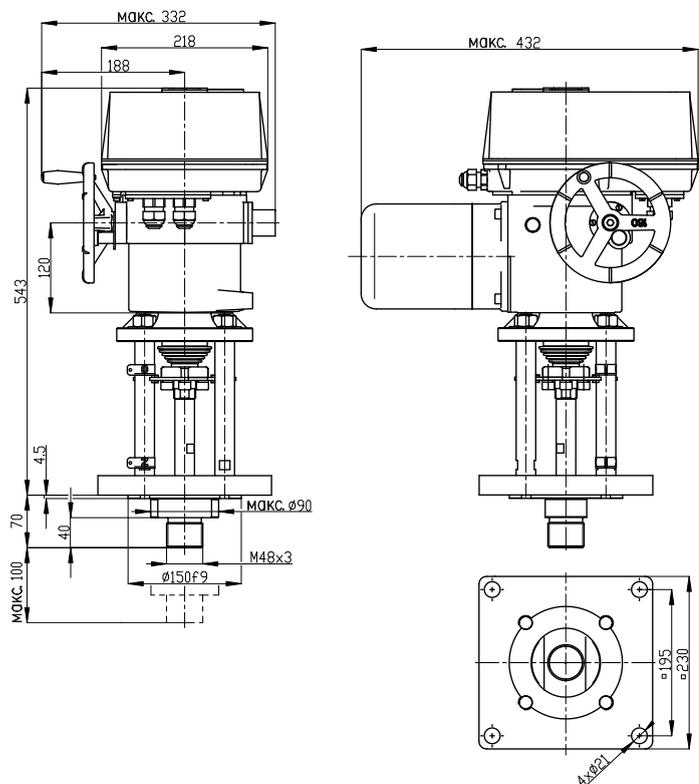


P-2018

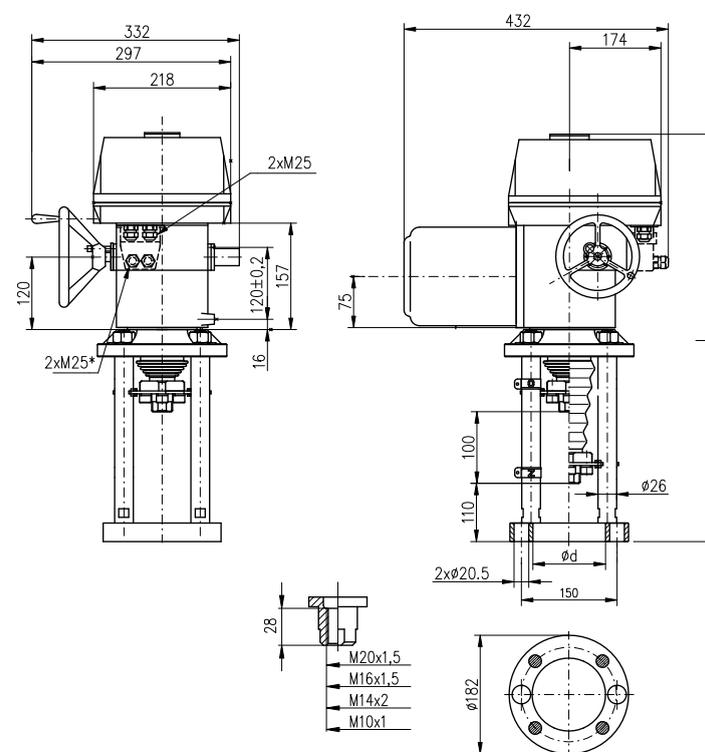


P-2021/D	85 H12	629
P-2021/C	80 H12	
P-2021/B	70 H12	
P-2021/A	65.15 H7	
Vyhotovenie (Version)	d	L

P-2021

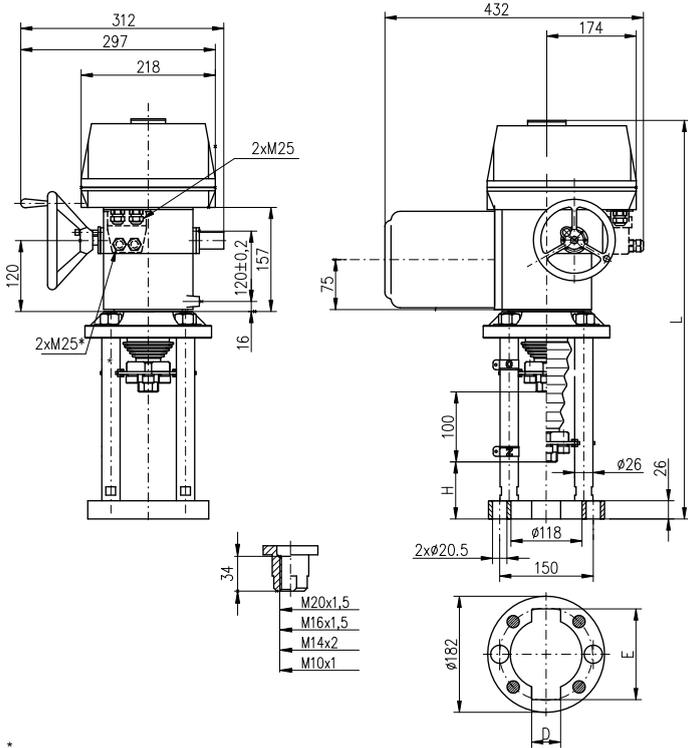


P-2020/C	130	685	-	-
P-2020/B	74	605	52	146
P-2020/A	30	561	-	-
	H	L	D	E

P-2020

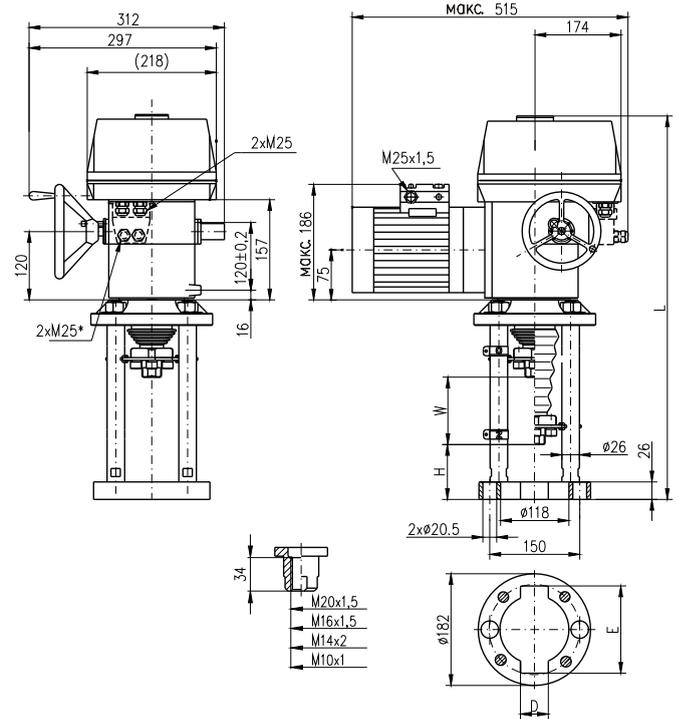

P-2019/I	60	541	60	-	-	36 kN
P-2019/H	130	666	80	-	-	
P-2019/G	74	610	80	52	146	
P-2019/F	30	565	80	-	-	
P-2019/E	60	526	60	-	-	25 kN
P-2019/D	50	526	40	-	-	
P-2019/C	130	660	100	-	-	
P-2019/B	74	605	100	52	146	
P-2019/A	30	561	100	-	-	
	H	L	W	D	E	


P-2019

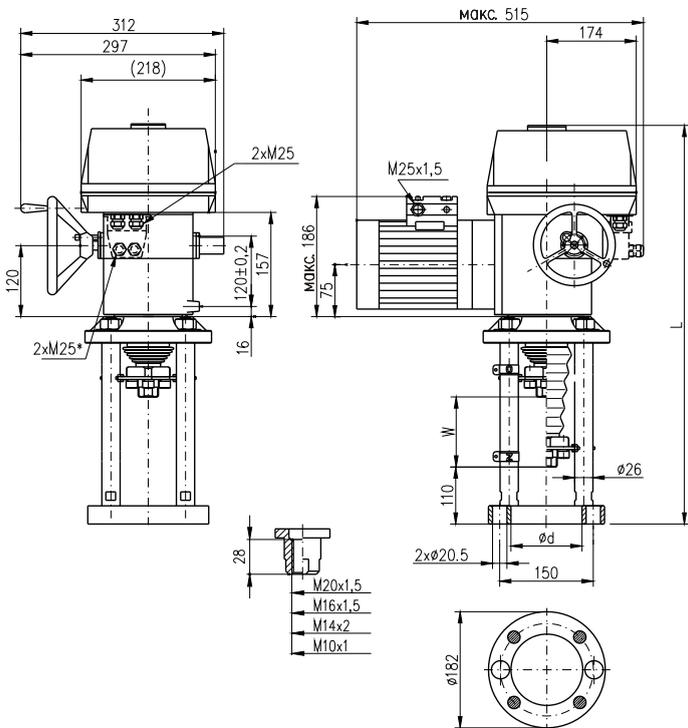

P-2022/H	644	80	85 H12	36 kN
P-2022/G			80 H12	
P-2022/F			70 H12	
P-2022/E	629	100	65.15 H7	25 kN
P-2022/D			85 H12	
P-2022/C			80 H12	
P-2022/B			70 H12	
P-2022/A			65.15 H7	
	L	W	d	

P-2022


220, 230 V AC

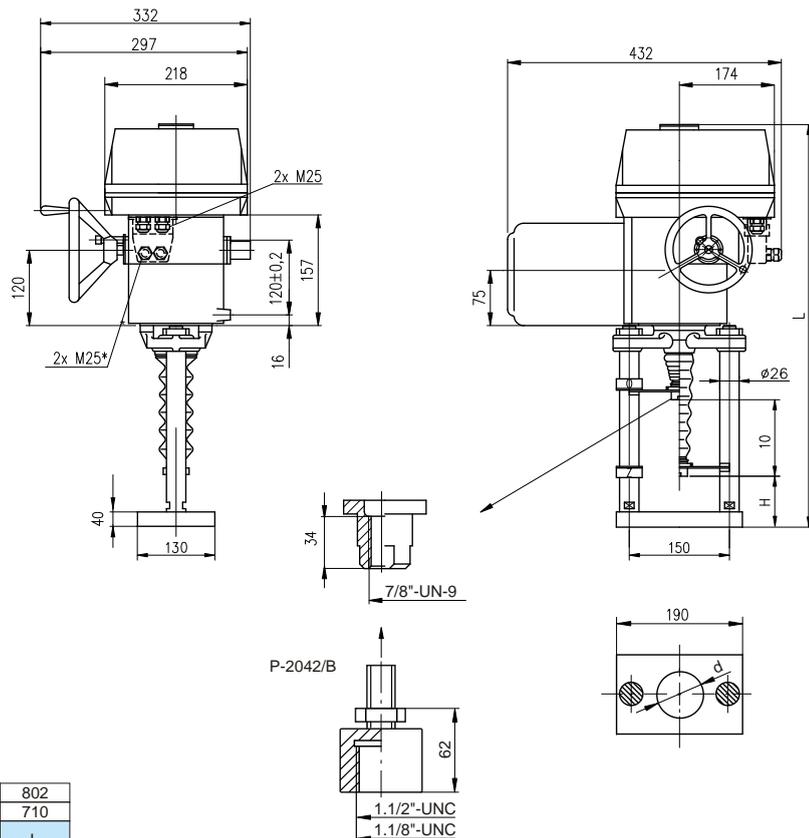

P-20xx/B	88 H8	160	802
P-20xx/A	88 H8	130	710
	Ød	H	L

P-2042

3x380, 3x400 V AC

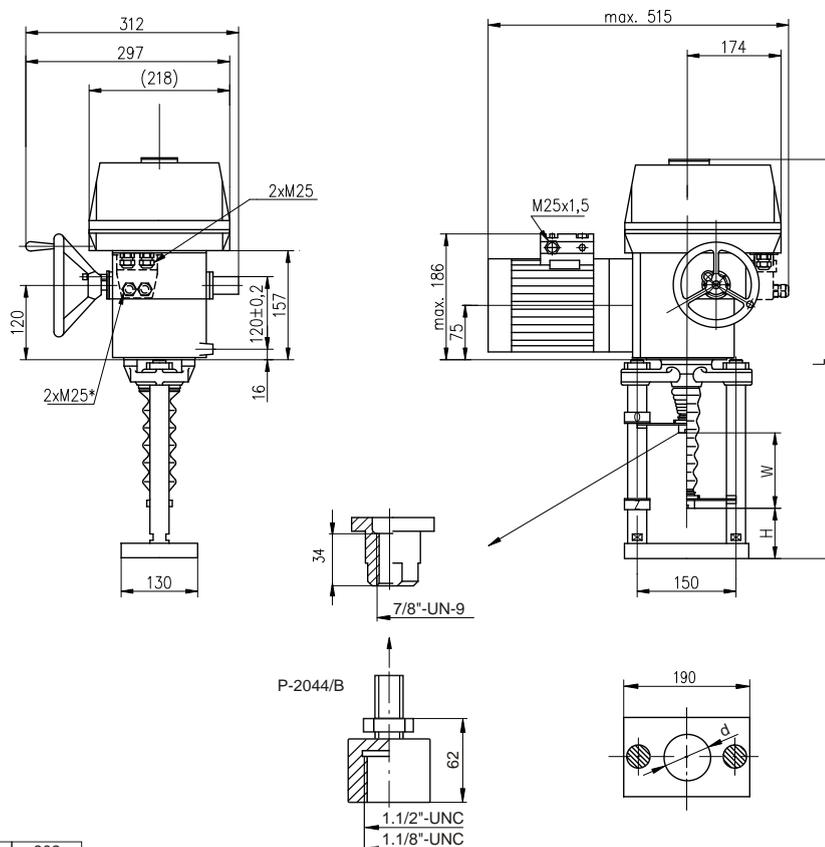

P-20yy/B	88 H8	160	802
P-20yy/A	88 H8	130	710
	Ød	H	L

P-2044

